

VOLTAGE :
SPANNUNG : 12V^{+3V}_{-2V}
VOLTAGE :
VOLTAGGIO :

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40° ... +70° C
GAMME D' APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

PROTECTED BY SEALED MALE CONNECTOR: IP 67 (DIN 40050
SCHUTZART BEI ABGEDICHTETER MESSERLEISTE: Blatt 9)
TYPE DE PROTECTION AVEC CONNECTEUR MALE ETANCHE:
PROTEZIONE DA UN CONNETTORE MASCHIO A TENUTA STAGNA:


REQUIRED FEMALE CONNECTOR WITH HOUSING :
ERFORDERLICHE FEMERLEISTE MIT GEHAEUSE : 446 009 005 2
CONNECTEUR FEMELLE REQUIS AVEC BOITIER :
NECESSARIO CONNETTORE FEMMINA CON CASA :

MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION:
MESSERLEISTE: OBERFLÄCHENSCHUTZ: GAL AG 3
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE:
SPINE MULTIPA: PROTEZIONE SUPERFICIALE:

CABLE TO BE LEAD BELOW
KABEL IST VON UNTEN HERANZUFUEHREN
CABLE A AMENER D' EN BAS
CONDURRE IL CAVO DAL BASSO


* * * DIRECTION FOR REMOVING THE PLUG
AUSHEBERICHTUNG DES FEDERKONTAKTGEHAEUSES
DIRECTION POUR RETIRER LA PRISE
DIREZIONE PER RIMOVERE LA SPINA

M = TORQUE
M = ANZUGSMOMENT
M = COUPLE DE SERRAGE
M = COPPIA DI SERRAGGIO

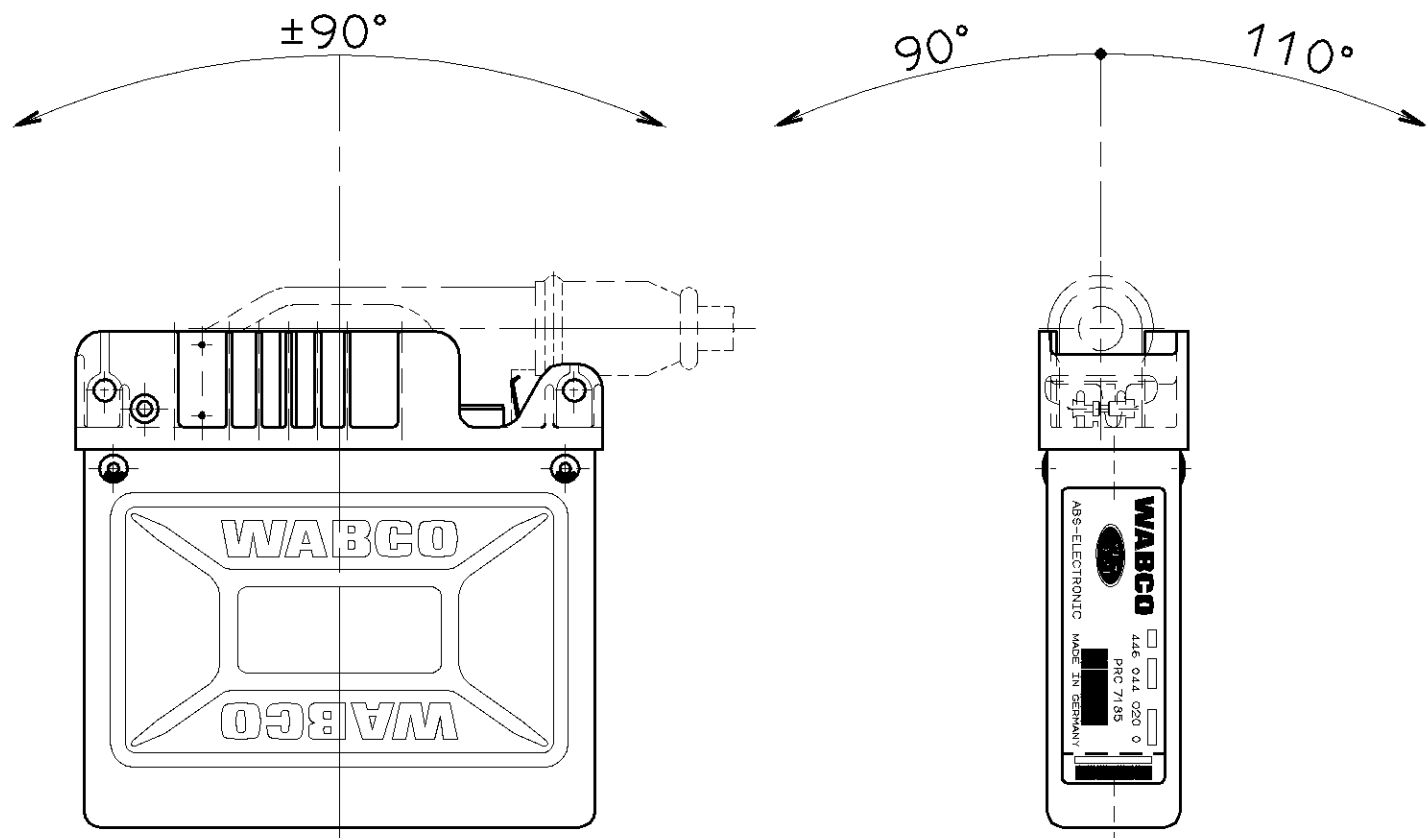

INSTALLATION POSITION :
EINBAULAGE :
POSITION D' INSTALLATION:
POSIZIONI DI MONTAGGIO :

③ SERIESNUMBER GREATER THAN:
SERIENNUMMER GROESSER ALS: 22000

GENERAL SPECIFICATION:		JED-334		CADD-DRAWING COPYRIGHT		WABCO	
FURTHER TECHNICAL DATA:				DATE			
DOC. CODE:		SHEET: TO		89-01-19 A. SCHULZ		ABS-HYDRAULIC-ELECTRONIC-35-POL.	
GENERAL TOLERANCES				DRAWN:		ABS-HYDRAULIK-ELEKTRONIK-35-POL.	
RANGE OF NOMINAL DIMENSIONS (± mm)				CHECKED:		ABS-HYDRAULIQUE-ELECTRONIQUE-35-POL.	
				STANDARDIZATION:		ABS-IDRAULICO-ELETRONNICA-35-POL.	
				89-01-20 LEHRMANN			
				89-01-20 PANTZER			
				MASS SCALE		PRODUCT IDENTIFICATION NO.	
				0,81			
				A) 1:1		DOC. CODE	
				SIZE		SHEET	
				T.B.I.		605 1/1	
				A 1		142	
						SHAPE CODE	
						REPLACEMENT FOR	
				EXPERT CODE		7 2 5	
				PRODUCT TYPE		0 0 0	

[illegible]